


KEY NOTES:

1. SMOKE DETECTORS SHALL RECEIVE THEIR PRIMARY POWER FROM THE BUILDING WIRING, AND SHALL BE EQUIPPED WITH BATTERY BACK-UP. ALL SMOKE DETECTORS SHALL BE INTERCONNECTED.
2. FULL BATH MUST HAVE AT LEAST ONE LUMINARE WITH LAMPS WITH AN EFFICACY OF AT LEAST 40 LUMENS PER WATT.
3. SHOWER AND OR TUB-SHOWER COMBINATIONS ARE TO BE PROVIDED WITH INDIVIDUAL CONTROL VALVES OF THE PRESSURE BALANCE, OR THE THERMOSTATIC MIXING VALVE TYPE. THE WATER TEMPERATURE MAXIMUM IS A SETTING OF 120 F. SHOWER WALLS SHALL BE FINISHED WITH A HARD, NON-SLIP SURFACE, AND NOT LESS THAN 70" ABOVE THE DRAIN INLET.
4. A 22" X 30" ATTIC ACCESS IS REQUIRED FOR ALL ATTICS WHICH ARE MORE THAN 30" IN HEIGHT. THE ATTIC ACCESS NEEDS TO BE IN AN ACCESSIBLE LOCATION AND IS NOT TO BE LOCATED ABOVE A CLOSET SHELF OR POLE. 30" MINIMUM HEADROOM IS REQUIRED. ATTIC EQUIPMENT ACCESS, WHICH EQUIPMENT NEED A 4" X 30" ACCESS OPENING, IS TO BE PROVIDED. THE COCESSABLE 22" X 30" ATTIC ACCESS OPENINGS ARE USED, PROVIDED THE LARGEST PIECE OF EQUIPMENT CAN BE REMOVED THROUGH THE OPENING.
5. MECHANICAL DEVICE CAPABLE OF PROVIDING 5 AIR CHANGES PER HOUR.
6. 42" HIGH RAILING WITH NO OPENING LARGE ENOUGH FOR A 4" SPHERE TO PASS THROUGH.
7. ALL RECEPTACLE OUTLETS INSTALLED IN BEDROOMS TO BE PROTECTED BY AN ARC-FAULT CIRCUIT INTERRUPTER.

SECOND FLOOR PLAN

SCALE 1/4" = 1'-0"

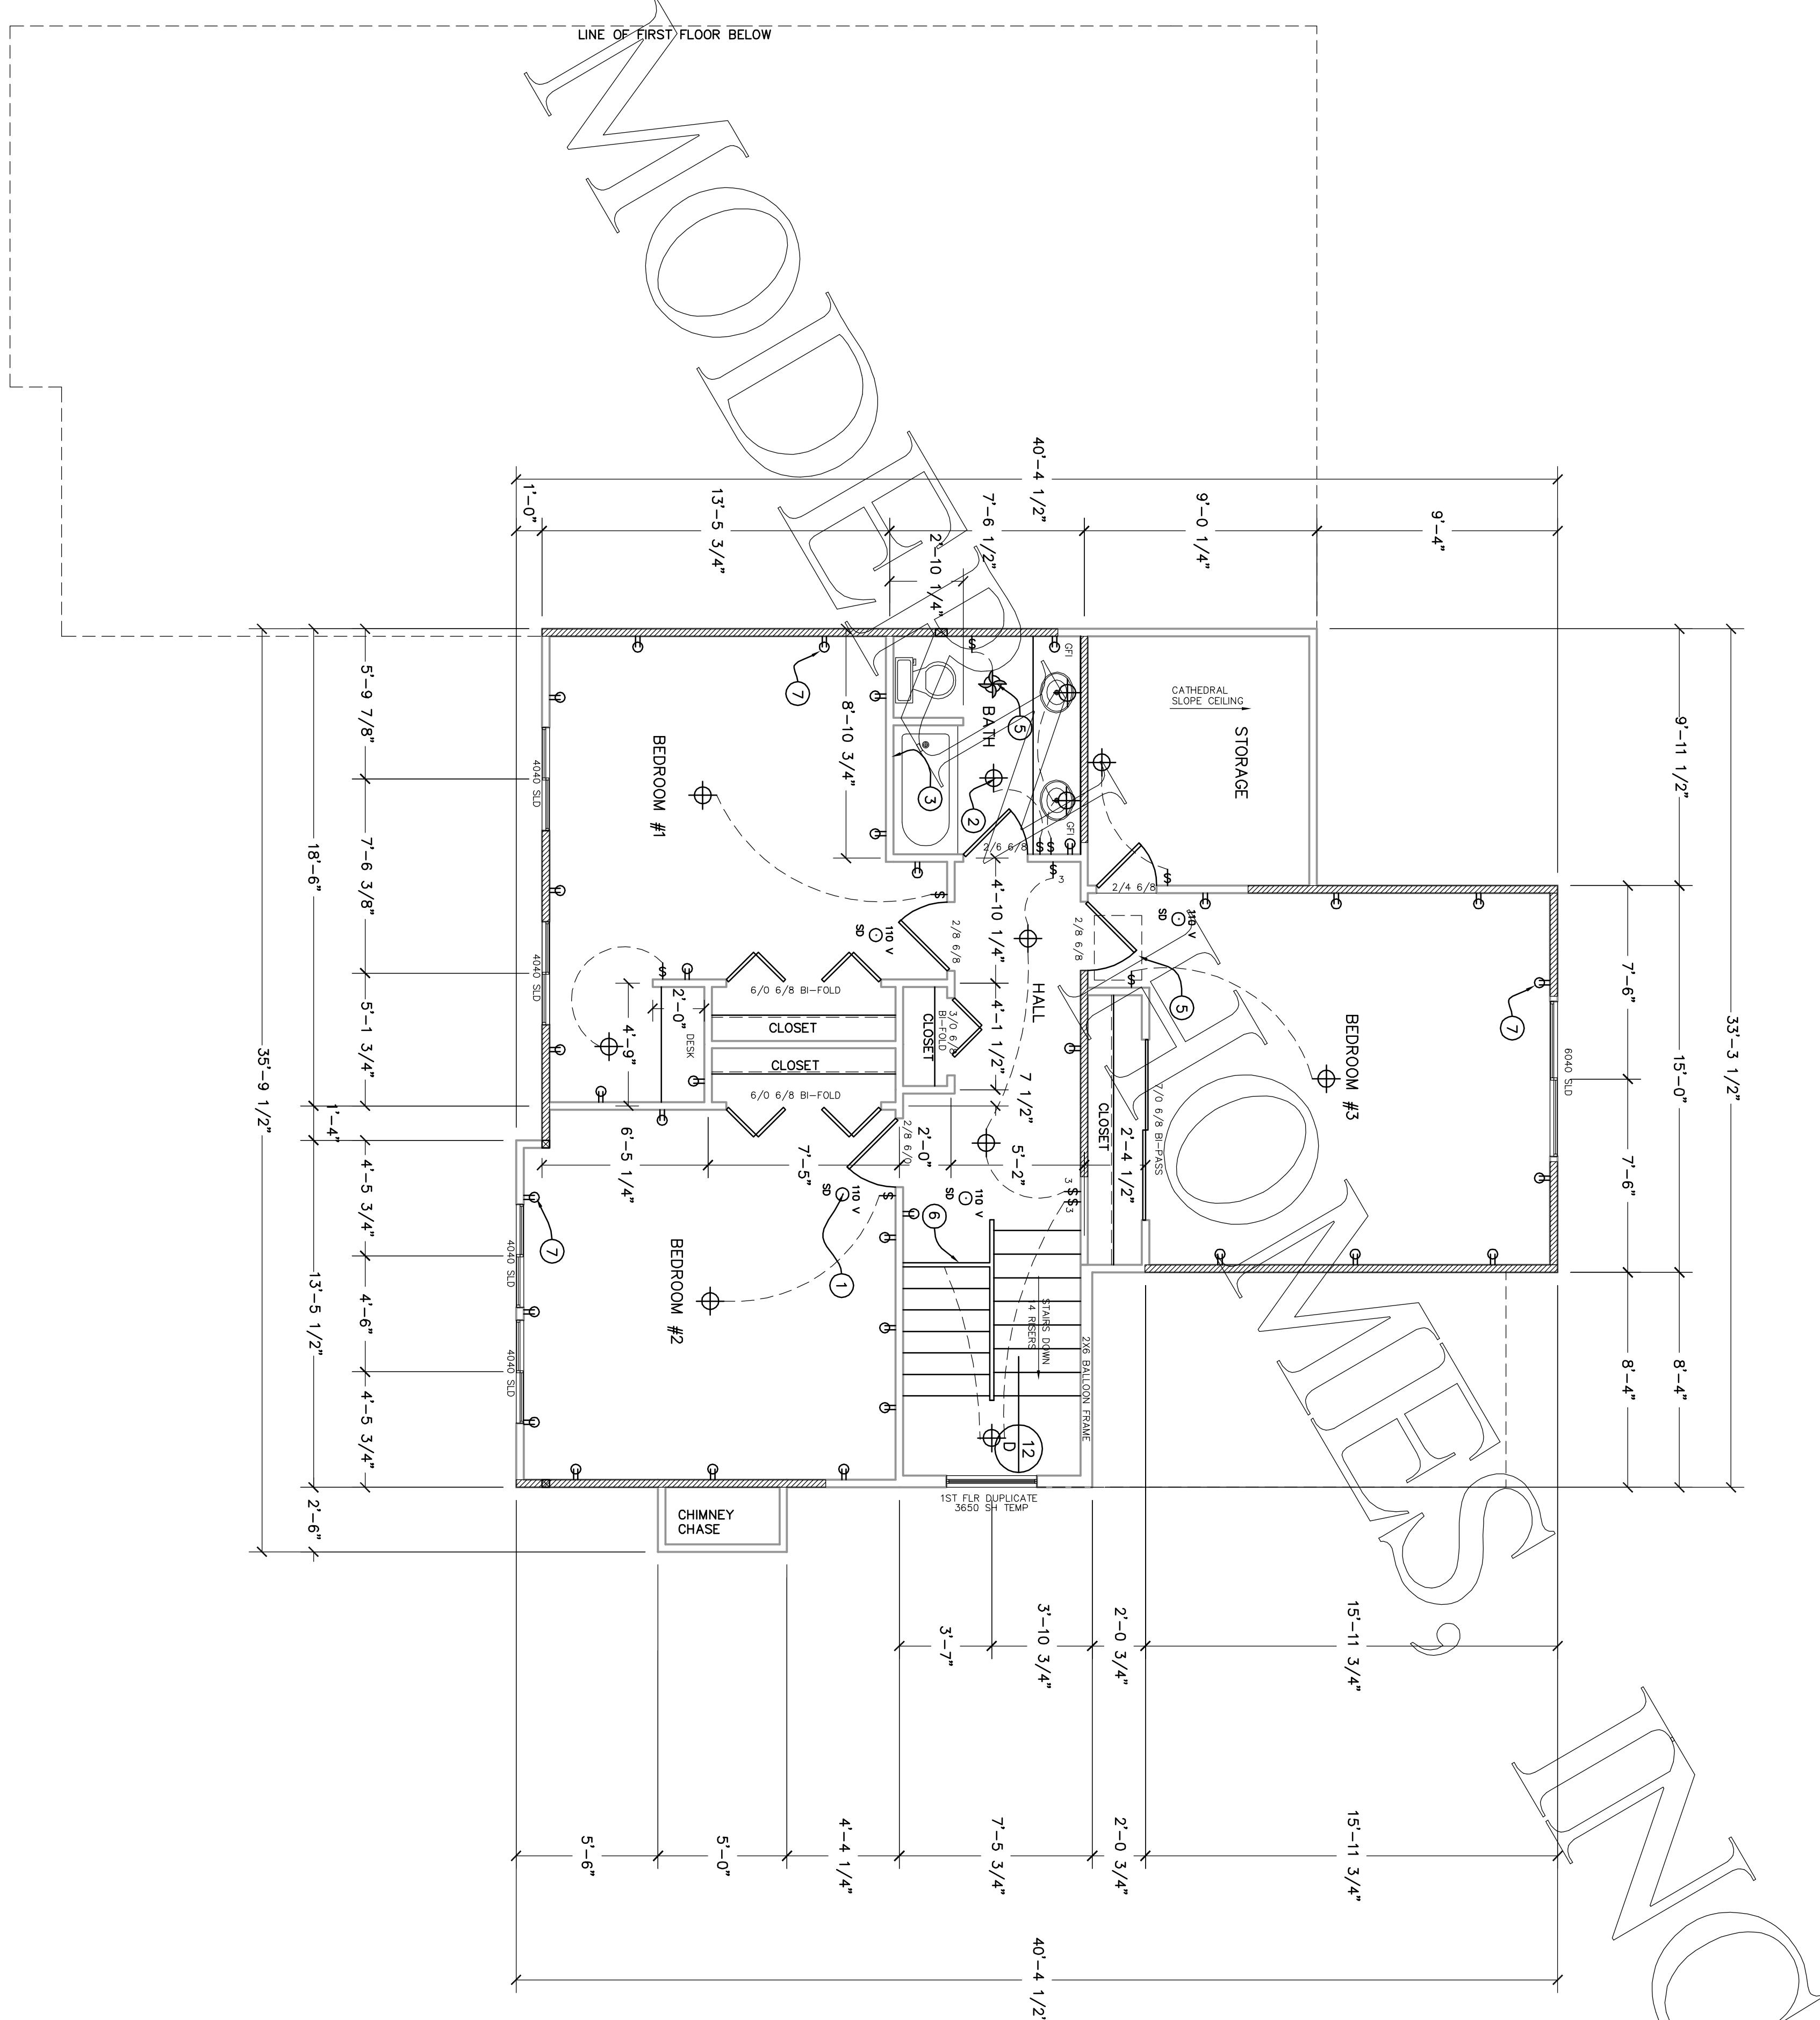

PRE-  
ENGINEERED  
ROCKPORT

RESIDENCE FOR:

PAGE TITLE

PACIFIC MODERN HOMES

P.O. BOX 670  
ELK GROVE, CA.  
95759-9514  
PHONE: (916) 685-9514



FLOOR PLAN

REVISIONS BY